

## RTS Controller

### Features

- Control of up to 16 RTS channels per MyLink from Android and iOS devices
- Join up to 10 MyLinks together for multi-zone control
- Manually activate RTS products
- Automate window coverings with scenes and schedules
- Supports Up/Down/My/Stop commands and incremental control (tilt/brightness)
- Multiple users
- Remote Access
- Third Party Integration over IP
- Compatible with Somfy Synergy™ API
- Compatible with Amazon Alexa

### Power Consumption

120V AC; 50–60Hz  
Ultra Low Power Wi-Fi (802.11 a/b/g/n)

### Enclosure


- PE
- UL94V-0 flame rating
- RoHS compliant

### Rated Current (Amps)

10– 50 mA

### Radio Frequency

- RTS: 433.42 MHz
- WiFi: 2.4 & 5GHz

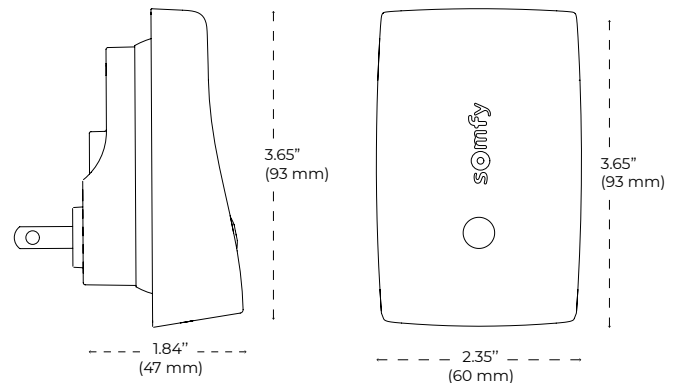

### MyLink Specifications

*For illustration purposes only*

### Dimensions

3.64" L x 2.35" W x 1.84" H  
(92 mm x 60 mm x 47 mm)  
1RU/Half Rack compatible

### Parts in the Box


#1811403  
1 MyLink, 1 Quick Start Guide

### Works with

- Nano Shades
- Zen 2 Shades
- Solo/Pro 2 screens

### Drivers

- Amazon Alexa
- Control4
- Crestron
- ELAN
- Savant
- URC

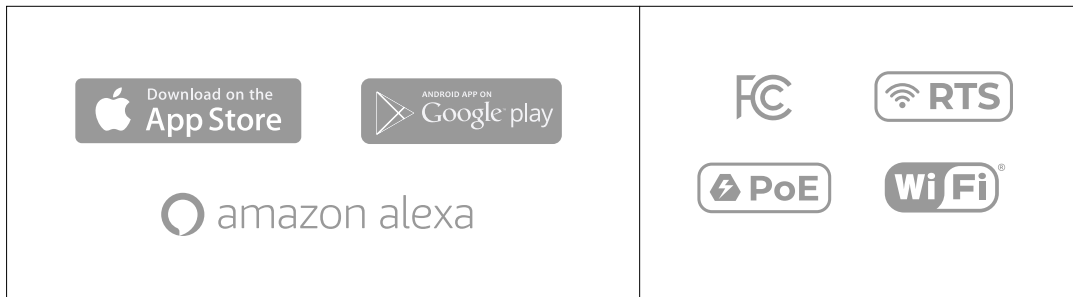

## Connections & Indicators

Element	Function
Setup Button	Engages Setup Mode
Status LED	<ul style="list-style-type: none"> <li>• <b>Solid Red:</b> Setup Mode. The MyLink is ready to accept WiFi network information or have its PIN changed. This is the mode the MyLink should be in out of the box</li> <li>• <b>Solid Green:</b> MyLink is successfully connected to a WiFi network</li> <li>• <b>Slow Blinking Green:</b> MyLink is trying to connect a WiFi network/ is disconnected from its known WiFi network</li> <li>• <b>Single Orange Blink:</b> MyLink is sending RTS commands</li> <li>• <b>Solid Orange:</b> Firmware update mode</li> <li>• <b>Slow Blinking Red:</b> MyLink is scanning both 2.4GHz and 5GHz bands for nearby WiFi networks</li> </ul>
3AC Prongs	AC Prongs