

Janus power supply options

Features

- Non-plenum 375 power supply can power up to 8 shades/screens
- Plenum 480 power supply can power up to 8 shades/screens
- 375 includes AC ON/OFF switch
- 375 has a blue power status LED

Power Consumption

375 : 3.3 A @ 115v AC

480 : 5 A @ 115v AC

Input

375 - 90~260v AC (IEC 320-C14/C18)

480 - 90~370v AC

Output

375 - 28v DC

480 - 24~28v DC

Material

375 - ABS IP42

480 - Aluminium


Operating Temperature Range

All : -30 C to +60 C

Shipping Weight

375 : 4.5 lbs

480 : 3.53 lbs

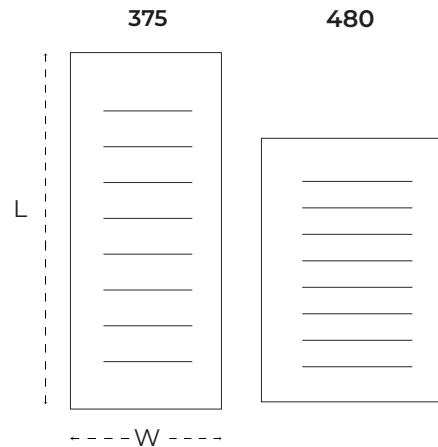

Power supply Specifications

For illustration purposes only

Dimensions

375

L 8.74" x W 4.4" x H 1.77"

(222mm x 112mm x 45mm)

480

L 5" x W 3.3" x H 4.9"

(128mm x 85mm x 125mm)

Parts in the Box

375 (#800340)- Power Supply, IEC Power cable - 6ft., 800 mm DC Extension cable for Janus

480 (#800328) - Power Supply, Pigtail cable - 6ft., DC Extension cable for Janus, AC pigtail cable - 6ft.

Note: 375 may also include Power Filter

Works with

- Janus
- Fontus
- Nano 485 LV, 485 AC, Zigbee / RTS LV Shades
- Zen Shades
- Veil drapes