



RTS - 24v DC MOTOR

v 1.1 | Aug 31 2020

Shade / Screen Applications

Input

24 - 28v DC

Limit Switch Type

Electronic

Limit Switch Capacity

38 Turns

Power Supply

SI Power Supplies (Janus)

Operating Temperature Range

32F to 140F (OC to 60C)

Torque

0.4 Nm - 4 Nm

Rated Current




1.5 A

Thermal Protection

5 min.

Pigtail: Data and Power

Included with every motor

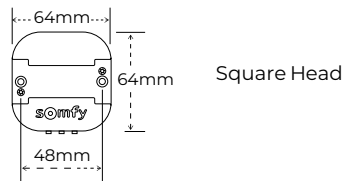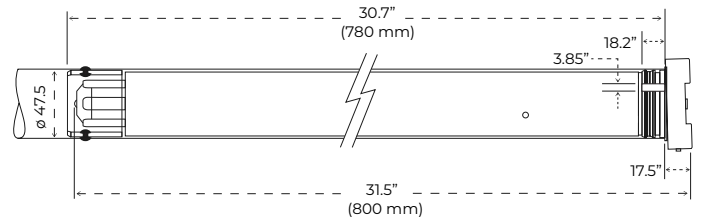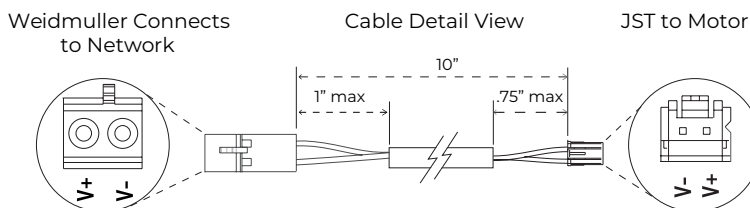

RTS - 24v DC Motor Specifications

For illustration purposes only

Dimensions

31.5" L X 2.5" W
(800 mm x 64 mm)

Speed

Adjustable: 10 - 25 rpm (default: 25)

Sound Level*

< 38dBA


* According to standards ISO 3741 NF 31022 in dBA ref 1pW at nominal torque without end product.

Compatible with

- LinkPro Z/ LinkPro
- TaHoma
- MyLink
- Janus (for power)

Conector Mark Detail View

Font: Ariel
Height: 2.3mm
Color: Black



Maximum Power Cable Length (to guarantee characteristics)

Guage	Length
14 AWG	240 ft.
16 AWG	150 ft.
18 AWG	100 ft.