

## Power and Control over 2-Conductors

### Features

- No Programming needed
- Plug-n-Play
- Full 2-way 485 Control
- Phantom power - only available when used with the correct cabling. (Please contact SI for help or to see if you have the correct cabling)
- Low Voltage Power Input - Fontus can receive power via any 7v - 28v DC power
- Connectors are compatible with all 485 shades

### Inputs / Outputs

- BCP - Inverted Header Side
- 485 - Header Side

### Power Input


7v - 28v DC

### Max. Wiring Distance (UTP)

- 18 / 2 up to 150'
- 16 / 2 up to 200'

### Optional Accessories

- Spike Kit
- Duocoup Expansion Kit (2 motor)
- Din Rail Bracket
- Single Gang Decora Keypad

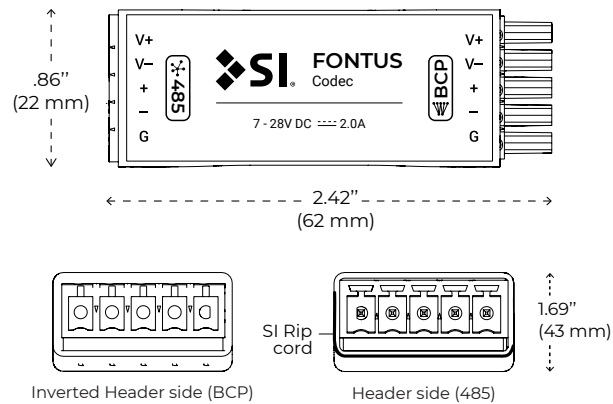

### Fontus Specifications

*For illustration purposes only*

### Dimensions

0.86" L x 2.42" W  
(22 mm x 62 mm)

### Package Options - In the Box

1 Shade Conversion Kit - #201484  
2 Fontus Codecs, 1 Five conductor jumper

8 Shades Conversion Kit- #201485  
16 Fontus Codecs, 8 Five conductor jumpers

### Color

White (default), and Black via SI rip cord

*All Fontus come with their corresponding mating connectors in both black and white.*

### Works with

- Fontus Keypad
- Nano shades
- Zen shades
- Solo / Pro 2 Screen
- Motorized 3 / 5 Screens
- Janus
- Duocoup