

## 485 Limit setting tool

### Features

- Plug-n-play, no PC or other hardware needed
- Buttons to set upper and lower limits and rotation
- Buttons to move the motor to the upper and lower limits
- Buttons to adjust and stop the motor
- Standard RJ45 (485) connection
- Includes 2, 5 - position terminal blocks for contact closure control
- Single gang Decora
- Power Status for Low-Voltage and AC motors

### Power Input

7v - 24v DC

### Data & Power cable length



60'

### Operating Temperature Range

Ambient Temperature

### Cable Pinout

Connection to 485

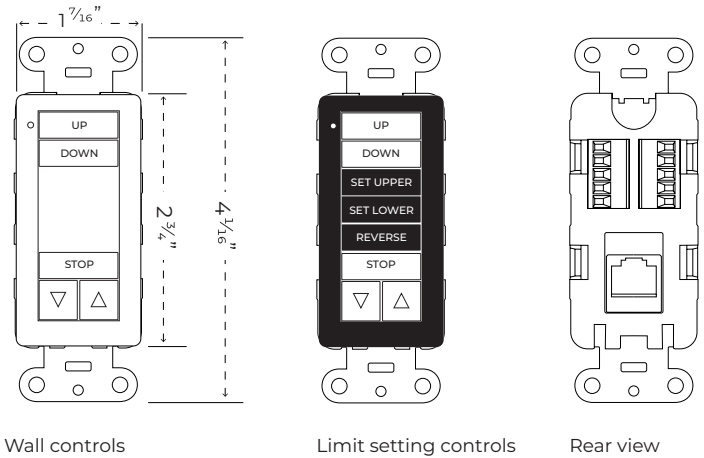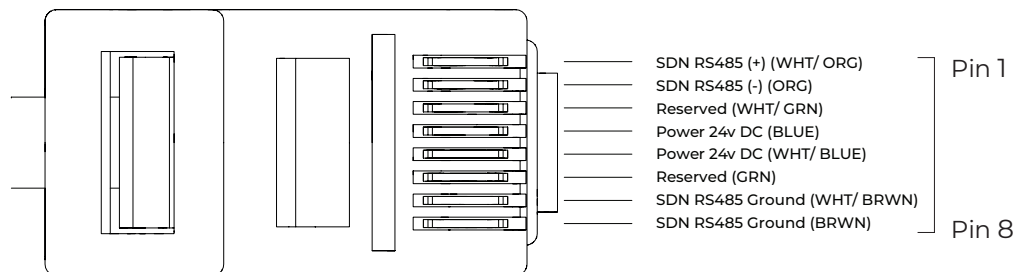

## 485 Decoset Keypad Specifications

### Dimensions

Keypad: 4.063" H x 1.44" W x 1.5" D  
 (103mm x 36.5 mm x 38 mm)

Interface: 0.78" H x 1.6" W x 0.9" D  
 (20mm x 40mm x 23mm)

### Parts in the Box

#### #201576

1 Keypad, 2 Decora Inserts, 2 Trim Plate Screws, 2 Wall Box Screws, 1 Screen Interface, 1 Cat5e (4m), 1 White Trim Plate

### Works with

- Solo / Pro 2 screens
- Nano Shades
- Motorized 5/3 screens
- Zen Shades

### Screen Interface

